

POLYMER NANOCOMPOSITES: AN OVERVIEW**SAMBARKAR PP*, PATWEKAR SL, DUDHGAONKAR BM**

School of pharmacy, S. R. T. M. U. Nanded, School of pharmacy, S. R. T. M. U. Nanded, Maharashtra College of pharmacy, Nilaga.

Email: pallavisambarkar@gmail.com

*Received: 7 Dec 2011, Revised and Accepted: 10 Jan 2012***ABSTRACT**

A review is presented on the recent developments concerning the concept of Nanocomposites. In This review we particularly focused on basic material used in polymer nanocomposites such as layered silicates, nanotubes and nanofibers, and inorganic material with the properties of these materials used and the application of different polymer nanocomposites particularly in biomedical and pharmaceutical field are discussed here, providing detailed reported in open literature.

Keywords: Polymer nanocomposites, Layered silicates, Nanotubes, Nanofibers, Inorganic polymer nanocomposites.

INTRODUCTION

Nanotechnology can be broadly defined as the creation; processing, characterization and utilization of material devices and system with dimension in the range of 0. 1-100 nm¹. The new concept of Nanocomposites proposed by Niihara ²have a new material design and concept which considerably enhanced strength and reasonable development in fracture toughness. Nanocomposites can be made with a improved physical, thermal and other unique properties³.

The following characteristics of nanocomposites observed by many researchers which are,

(A) Strong change of fracture mode from intergranular fracture of monolithic alumina to transgranular fracture of nanocomposites.

(B) Moderate to considerable improvement in strength.

(C) Enhancement of fracture toughness.

(D) Improvement of several mechanical properties ^{2,4}.

Polymer-based composites were herald in the 1960s as a new concept for materials ⁵.

Polymers are attractive as matrix, and several approaches have been reported to incorporate metal nanoparticles into polymers ⁶. The synthesis of polymer nanocomposites is generally carried out by the following methods.

- One is based on insitu polymerization of monomers inside the galleries of the inorganic host⁷.
- The other approach is based on melt intercalation of polymers and it involves annealing a mixture of the polymer and the inorganic host, by dispersing, strong, highly stiff fibres in a polymer matrix^{8,9}.

Polymers nanocomposites will supply materials that acquire the ease of processing with significantly improved and even multifunctional properties, opening the way to absolutely new applications of polymers. Polymer-nanoparticle composite whether in solution or in bulk, these materials offer unique mechanical electrical, optical and thermal properties⁹. Techniques used for preparation of polymer nanocomposites are spun polymer fibers with carbon nanofibers as reinforcement. Various techniques are used to dispersion of carbon nanofibers in polymer matrix such as evaporation and sputtering of metallic and organic components². In general two idealised polymer layered nanocomposite structures are possible intercalated and exfoliated³. Commonly used polymers are Polyacrylates, Polystyrene, Polyacrylamide, Polycarbonates, Polyimides, Polysulfone, Polyetherimide etc¹⁰.

In this review we will focus on Basic Materials for Polymer Nanocomposites like Layered Silicates, Carbon Nanotubes and Nanofibers, Inorganic Nanoparticles with applications of different polymer nanocomposites in pharmaceutical field.

Properties of Polymer-Based Nanocomposites

Polymer-based nanoparticle nanocomposites were prepared via a range of processes and shows following mechanical, optical, electrical properties, and thermal properties.

1. Mechanical properties

To get better mechanical properties such as the tensile strength, modulus or stiffness the inorganic material can be added¹¹. Though poor compatibility between the polymer matrix and the inorganic particles in nanocomposites prepared by simple physical mixing will produce intrinsic defects which, consequently, result in a harmful effect on the mechanical properties of the nanocomposite.¹²

The mechanical properties of nanocomposites, prepared from various polymers and inorganic particles, did not always enhance. In some cases, the properties of nanocomposites were decrease by the addition of inorganic particles because of aggregation in polymer matrices¹³. To resolve this difficulty, the load amounts of inorganic particles were optimized with organic material.

2. Optical properties

The optical properties of metal nanoparticles consisting of dielectric have long been of concern¹⁴. The expansion of materials for optical applications with functionality and clearness increases ¹⁵. Polymer-based inorganic nanocomposites show great promise as they can give the necessary stability and easy processability with interesting optical properties. The transparency of these composites depends upon the size and spatial distribution of inorganic particles in the polymer matrix ¹⁶.

3. Electrical properties

Nanocomposites are strongly related to the invent of advanced devices for electronic and optoelectronic applications. The dimensional scale for electronic devices has entered the nano-range¹⁷. The efficacy of polymer/inorganic particle nanocomposites in these areas is quite varied involving many possible applications as well as types of nanocomposites.

4. Thermal properties

For structural application at elevated temperatures, the dimensional constancy of low thermal expansion coefficient of these nanocomposites is also very important ¹⁸. The high thermal expansion coefficient of neat polymers causes dimensional changes during the molding procedure.

Types of polymer Nanocomposites based on basic material used**1] Polymer Nanocomposites based on Layered Silicates**

Silicates could absorb catalysts and initiate monomer to make polymer silicates nanocomposites ¹⁹. The polymer adsorption onto the silicates surface plays significant role to affect the diffusion rate

of the polymer²⁰. Silica coating provides an efficient barrier to quenching of any fluorophore by the magnetic cores²¹. Layered silicates are prepared by incorporate finely dispersed layered silicates materials in a polymer matrix. Different approaches can be integrated the ion exchange layered silicates in polymer hosts by in situ polymerization, simple melt mixing or solution intercalation^{22, 23}. The use of layered silicates as a immense potential for producing materials considered by enhanced flame retardancy along with better physical properties²⁴. Stronger interface between the polymer and silicates clay produces enhanced materials with improved mechanical properties²⁵. Layered silicates use in the production of nanocomposites are natural or synthetic minerals, consisting of extremely thin layers that are generally bound together with counter-ion²⁶. Silica nanoparticles have been widely used at different engineering fields such as biomarker, drug-carrier, nanosensor and nanosized filler because of their biocompatibility and chemical stability²⁷. The most commonly used layered silicates are montmorillonite, saponite and hectorite.

Recently, numerous attempts have been made for structural and conformational aspect of polymers in layered silicate based nanocomposites, using techniques such as dynamic light scattering, small angle neutron scattering (SANS), XRD and transmission electron microscopy (TEM)²⁸.

Properties of polymer Nanocomposites based on Layered Silicates

Nanocomposites consisting of a polymer and layered silicate remarkably enhanced mechanical and materials properties. The main reason for enhancement of properties in nanocomposites is the greater interfacial interaction between the matrix and layered silicate, compared with conventional filler-reinforced systems.

Tensile properties

The tensile modulus of a polymeric material has been revealed to be extremely improved when nanocomposites are formed with layered silicates. N6 nanocomposites prepared through in situ intercalative ring opening polymerization of 1-caprolactam, leading to the formation of exfoliated nanocomposites, show a drastic increase in the tensile properties at quite low filler content. The major cause for the strong improvement in tensile modulus in N6 nanocomposites is the strong interaction between matrix and silicate layers via formation of hydrogen bonds²⁹.

Heat distortion temperature

Heat distortion temperature (HDT) of a polymeric material is an indicator of heat resistance towards applied load³⁰.

Thermal stability

The thermal stability of polymeric materials is studied by thermogravimetric analysis (TGA). The weight loss because of the formation of volatile Products after degradation at high temperature is examine as a function of temperature. When the heating occur under an inert gas flow, a non-oxidative degradation occurs and when the air or oxygen is used oxidative degradation of the samples occurs. Commonly, the incorporation of clay into the polymer matrix was found to improve thermal stability by acting as a superior insulator and mass transport barrier to the volatile products generated during decomposition³¹.

Optical transparency

Layered silicates are microns in size they are about 1 nm thick. Thus, when single layer is diffuse in a polymer matrix, the resulting nanocomposite is optically clear in visible light³².

Ionic conductivity

Solvent-free electrolytes are of great interest because of their charge-transport mechanism and their probable applications in electrochemical devices³³.

2] Polymer Nanocomposites based on Nanotubes/Nanofibres

Carbon nanotubes (CNTs) are allotropes of carbon with a cylindrical nanostructure. Nanotubes have been constructing with length-to-diameter ratio of up to 132, 000, 000:1 much larger than for any other material. These cylindrical carbon molecules have properties which are important for nanotechnology, optics, electronics, and other fields of materials science and technology³⁴. In particular, due to their extraordinary thermal conductivity, electrical and mechanical properties, carbon nanotubes may find applications as additives to a variety of structural materials.

The development of nanotubes of carbon has involved a major deal of consideration in the last decade since of various attractive properties such as high anisotropy, small dimensions and absorbing tube-like structures. Carbon nanotubes and nanofibers developed by diffusion of carbon (by way of catalytic decomposition of carbon containing gases vaporized carbon from arc discharge or laser ablation) through catalyst and its consequent precipitations as a graphitic filament³⁵. The synthesis of nanotubes other than carbon atoms may be possible and they are relatively small, 15-nm-diameter tubes made of molybdenum disulfide and tungsten. Other layered materials synthesized as nanotubes, tube-like forms, had been reported like boron nitride nanotubes with diameters of a few nanometers.

There are three common types of carbon nanotubes which is having high structural perfection. Single-walled nanotubes (SWNTs), Multiwalled nanotubes (MWNTs), Carbon Nanofibers (CNF). consists of a single graphite sheet femalely which is wrapped into a cylindrical tube. Single-walled carbon nanotubes (SWNTs) which show a range of remarkable mechanical and electronic properties because of their unique structure and dimensions³⁶. Multiwalled nanotubes (MWNTs) which comprise of an group of such nanotubes that are concentrically nested like rings of a tree trunk³⁷. Single-walled carbon nanotubes (SWNTs) reveal a range of remarkable physical, electronic, mechanical properties because of their unique structure and dimensions. Carbon nanotube has commercial interest because of their conductivity at very low loading levels³⁸.

Morphology of Single-walled nanotubes (SWNTs) and Multiwalled nanotubes (MWNTs)

The morphology of nanotubes shows a high degree of variability. Variability includes the nanotube length, diameter, chirality and tube-end configuration¹. SWNTs and MWNTs are usually made by carbon-arc discharge, laser ablation of carbon, or chemical vapor deposition³⁹. Diameter of SWNTs ranges from 0.4 to >3 nm. and the diameter of MWNTs ranges from 1.4 to at least 100 nm.⁴⁰

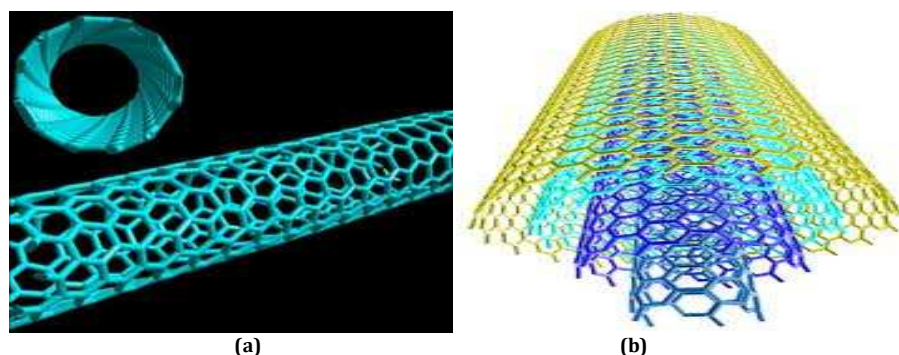


Fig. 1: a) Single-walled carbon nanotubes⁴¹ b) Multiwalled carbon nanotubes⁴²

Nanotubes sheets, fibers and composites should retain the properties of individual nanotubes as far as possible. Both SWNTs and MWNTs are used for reinforcing thermoset polymer (epoxy, phenolic and polyimide) as well as (polypropylene, polystyrene, poly methyl methacrylate (PMMA), nylon 12 and poly ether ether ketone (PEEK).

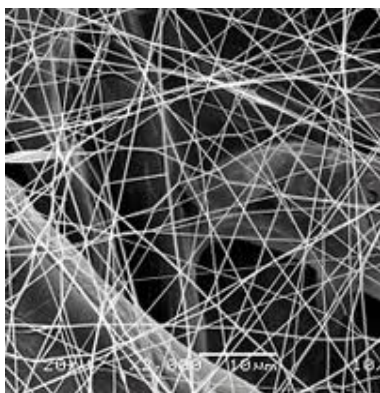


Fig. 2: Nanofibre⁴³

Ogasawara et al.⁴⁴ reinforced a phenylethyl terminated polyimide with MWNTs, which are a few hundred nm in length and diameter range up to 20-100 nm. The composite were made by mechanical blending of nanotubes in matrix. The modification of nanotube surface by the formation of covalent chemical bonds between nanotubes and polymer matrix, and enhances their interaction and gives rise to higher interfacial shear strength than van der waals bonds.

Properties of Nanotubes/Nanofibres

The properties of CNT are important to understand for designing composite materials Properties of nanotubes and nanostructured materials are discussed as follows

Elastic and thermal properties

Nanotubes are the stiffest known fiber⁴⁵. The tensile strength is ranges upto 50 GPa or above⁴⁶. When compared with carbon reinforcing fibers, the strength to weight ratio of nanotubes in the axial direction is up to four times greater. The greatest strain of SWNT is 10%, which is superior than most structural materials. These strong mechanical properties are due to the C-C covalent bonding and the seamless hexagonal network. Thermal conductivity is also very high in the direction of the nanotube axis, typically about 1750-5800 W/mK.

Electrical conductivity

Electronically, the carbon nanotube can be metallic or semiconducting, depending on the chirality. Carbon nanotubes also have been predicted to conduct current ballistic ally without dissipating heat. Metallic SWNT behave as long ballistic quantum conductors with the charge carriers and it has the strongest electrochemical properties perhaps because the lower resistance allow a greater double layer charge buildup⁴⁷.

Magnetoresistance

The CNT also have spin-dependent transport properties or magnetoresistance. The direction of magnetization of the ferromagnetic electrodes used to contact the nanotube, defines the spin direction of the charge carriers into and out of the nanotube and a change in the resistivity of the nanotube. The nanotube-metallic junction appears to have a strong effect on the spin-dependent transport⁴⁸.

Piezoresistance

A pioneering experiment shows that the conductance of a metallic CNT might decrease by orders of magnitude when strained by an atomic force microscope tip. It appears that the band structure of a

carbon nanotube is dramatically changed by mechanical strain and that the conductance of the CNT can increase or decrease depending on the chirality of the nanotube⁴⁹.

Electrokinetics of nanotubes

The electrical properties (conductivity and dielectric constant) of a nanotube are generally different than of the fluid. Therefore, when a nanotube is in an electrolyte, it will attract ions of opposite electrical polarity forming an electrical double layer⁵⁰.

3] Polymer Nanocomposites based on Inorganic Material

Polymeric composites consisting of inorganic nanoparticles and organic polymers represent a new class of materials, which enhance performance compare with their micro-particle counterparts⁵¹. Polymer-inorganic nanocomposite materials are inorganic nanofiller dispersed at a nanometer level in a polymer matrix⁵². The inorganic particles provides mechanical and thermal stability, and new functionalities that depend on the chemical nature, the structure, the size, and crystallinity of the inorganic nanoparticles (silica, transition metal oxides, , nanoclays, metallic phosphates, metal chalcogenides and nanometals) the inorganic particles can execute or get better mechanical, thermal, magnetic, electronic properties, density and refractive index, etc⁵³.

Methods for the preparation of polymer-based inorganic nanoparticles composites

Various methods are used for preparation of polymer based inorganic nanocomposites. The important ones are:

- (i) Intercalation of nanoparticles with the polymer or pre-polymer from solution^[32].
- (ii) In situ intercalative polymerization⁵⁴.
- (iii) Melt intercalation⁵⁵.
- (iv) Direct mixture of polymer and particulates⁵⁶.
- (v) Template synthesis⁵⁷.
- (vi) *In situ* polymerization⁵⁸.
- (vii) Sol-gel process⁵⁹.

The most important one is possibly the incorporation of inorganic nanoparticles in polymers. Polymer based nanocomposite synthesis affected by inorganic particles size, content, molecular weight and properties of inorganic particles.

Maleic anhydride (MA) grafted polyethylene/clay nanocomposites were prepared by simple melt compounding⁴⁵. The exfoliation and intercalation behaviors depended on the hydrophilicity of polyethylene grafted with maleic anhydride and the chain length of organic modifier in the clay. When polyethylene has a higher grafting level of MA than the critical grafting level of MA (0.1 wt %) and the number of methylene groups in alkylamine chain has more than 16, polyethylene/clay nanocomposites are completely exfoliated.

Applications of Polymer Nanocomposite

Nanocomposites are of huge interest to biomedical technologies such as controlled drug delivery, tissue engineering, dental applications, and bone replacement/ repair. some biopolymers commonly used in biomedical applications.

1. Hydroxyapatite (HAP)-polymer nanocomposites is used as a biocompatible and osteoconductive substitute for bone repair and implantation⁶⁰.
2. Collagen-basedis polypeptidic gelatine most widely used in wound dressings and pharmaceutical adhesives in clinics⁶¹.
3. Polysaccharides like alginate provide a natural polymeric sponge structure that is used in tissue-engineering scaffold design⁶².
4. Composite membranes from HAP nanoparticles and chitosan/collagen sols have also been synthesized to study connective-tissue reactions⁶³.
5. Studies of the nucleation of calcium phosphates and bone cell signalling used acidic macromolecules as the nanocomposite matrix. Specially amino acids like aspartic acid and glutamic acid are used as the matrix protein. Both of these amino acids

- are play an important role in intercellular communication and osteoblast differentiation that increases extracellular mineralization⁶⁴.
- Aliphatic polyesters used as the major choice for materials in degradable drug delivery systems⁶⁵.
 - The polyesters are used in biomedical fields, poly (L-lactic acid) (PLLA) is the most widely used⁶⁶.
 - PLLA has general applications in drug delivery devices, scaffolds, sutures, prosthetics, bone screws, vascular grafts for temporary internal fixation⁶⁷.
 - Montmorillonite Clay (MMT) in a PLLA solution are used to improve mechanical and biodegradation characteristics and ideal pore sizes (microns) for blood vessel invasion, cell growth, and nano-sized pores for nutrient/waste transfer⁶⁸.

- The use of organically modified layered silicates predominantly attractive among for biocompatibility and mechanical properties⁶⁹.
- Quantum dots (QD) can be treated with drug moieties for instance, non-steroidal anti-inflammatory drugs, in order to specifically target certain organ or cell organelles^[66].
- The nanoparticle size plays a significant role in determining the magnetic response of the materials and hence influence its biomedical activity⁷⁰.
- Nanocomposites can be used as agent in nanomedicine, for example one of the most promising application is a bimodal anticancer therapy, encompassing photodynamic and hyperthermic capabilities⁷¹.
- Applications of magnetic-fluorescent nanoparticles is in cell tracking, diagnostic, cytometry, magnetic separation and to treat various diseases⁷¹.

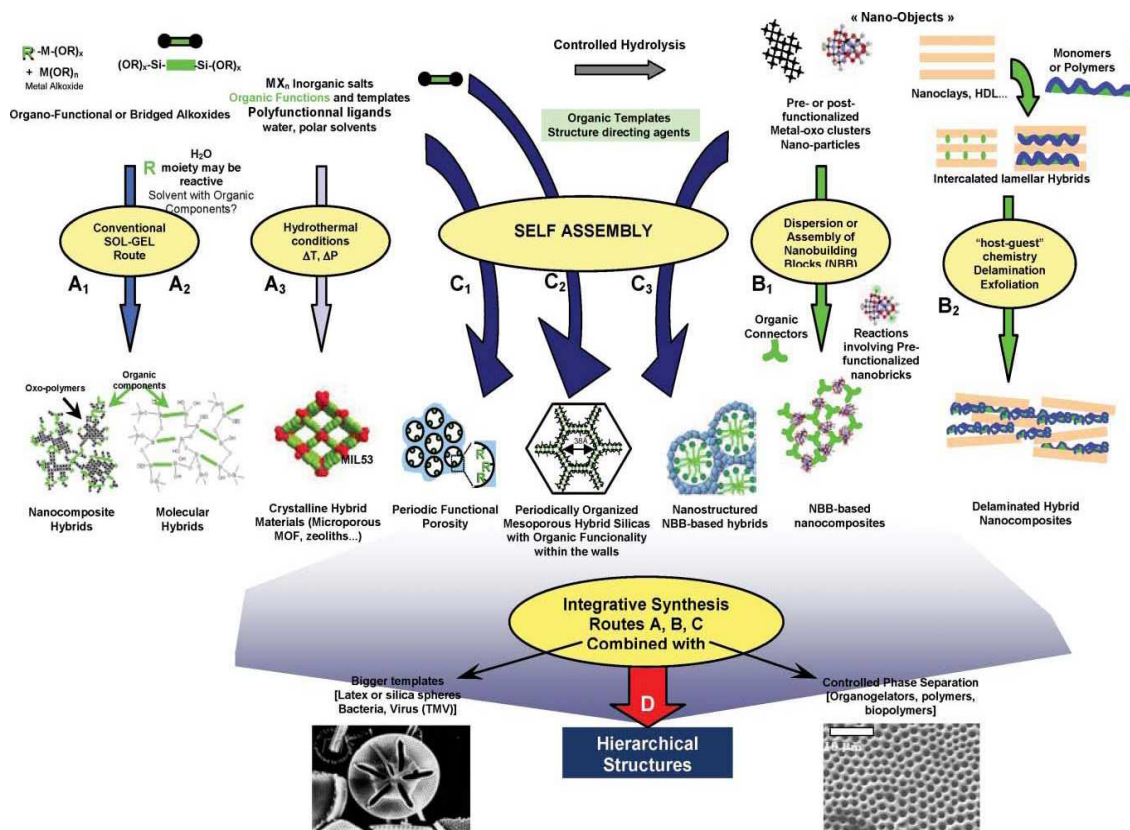


Fig. 2: Schematic representation of the main chemical routes for the synthesis of polymer-inorganic nanocomposites. Path A: sol-gel process; Path B: assembly or dispersion; Path C: self-assembly procedures; Path D: integrative synthesis¹⁶.

CONCLUSION

This review reports on the basic materials used in polymer nanocomposites properties and application in pharmaceutical field. A layered silicate shows properties such as tensile properties, thermal stability. In recent years nanotubes and nanofibers shows excellent properties such as mechanical strength and toughness, they are considered a promising reinforcing material. Various different polymers are recently used in pharmacy field for the development in tissue engineering, controlled drug delivery, bone replacement/repair, dental application.

REFERENCES

- Erik T. Thostenson, Chunyu Li, Tsu-Wei Chou. Nanocomposites in context, Composites. Science and Technology 65 (2005) 491-516
- Seong-Min Choi, Hindeo Awaji, Nanocomposites –a new material design concept. Science and technology of advanced material 6 (2005).
- Steven L. Masia, Nanocomposite Review. Current Scientific and Technical Advances.
- S. M Choi, Honda T. Nishikawa, H. Awaji, F. D. Gnanm, K. Vishita, T. Kuroyama, Design Concept of strengthening and toughening mechanism in nanocomposites –ceramic metal Nanocomposites. J. Ceram. Soc. Jpn 112(2004) S912-S915.
- T. Ramanathan¹, A. A. Abdala, S. Stankovich, D. A. Dikin¹, M. Herrera-Alonso, R. D. Piner, et. al. Functionalized graphene sheets for polymer nanocomposites Published online: 11 May 2008; doi:10. 1038/nano. 2008. 96.
- Franz Faupel, Vladimir Zaporotchenko, Henry Greve, Ulrich Schürmann, Haile Takele, Christian Hanisch, et. al. Polymer nanocomposites for functional applications.

7. Md. Shahidul Islama, Md. Ashrafal Islam Mollaa, Mithun Sarkera, Mohammad Mainul Karima, Shah Md. Masuma and Jeong Hyun Yeumb. International Journal of Basic & Applied Sciences IJBAS-IJENS Vol: 11 No:01
8. Vaia R, Vasudevan S, Krawiec W, Scanlon LG, Giannelis EP. New polymer Electrolyte nanocomposites. Melt intercalation of poly (ethylene oxide) in mica-type silicates. *Adv Mater* 7:154-156
9. Usuki A, Kato M, Olada A, Kurauchi T. Synthesis of polypropylene-clay hybrid. *J Appl Polym Sci* 63:137.
10. Suprakas Sinha Ray and Mosto Bousmina. *Polymer Nanocomposite and Their Applications*, October 2006 American Scientific Publishers.
11. Wang, K., Chen, L. Nanocomposites with highly exfoliated clay: Mechanical properties and fracture mechanisms. *Macromolecules* 2005,
12. Han, K., Yu, M. Study of the preparation and properties of UV-blocking fabrics of a PET/TiO₂ nanocomposite prepared by in situ polycondensation. *J. Appl. Polym. Sci.* 2006,
13. Sarwar, M. I., Zulfiqar, S., Ahmad, Z. Polyamide-silica nanocomposites: Mechanical, Morphological and thermomechanical investigations. *Polym. Int.* 2008.
14. Garnett, J. Colours in metal glasses, in metallic films, and in metallic solutions. *Philos. Trans. R. Soc. London A* 1906, 237-288.
15. Biswas, A.; Aktas, O. C.; Kanzow, J.; Saeed, U.; Strunskus, T.; Zaporotchenko, V.; Et. al. Polymer-metal optical nanocomposites with tunable particle plasmon Resonance Prepared by vapor phase co-deposition. *Mater. Lett.* 2004, 58, 1530-1534.
16. In-Yup Jeon and Jong-Beom Baek Nanocomposites Derived from Polymers and Inorganic Nanoparticles *Materials* 2010, 3, 3654-3674.
17. Su, S. J., Kuramoto, N. Processable polyaniline-titanium dioxide nanocomposites effect of titanium dioxide on the conductivity. *Synthet. Metal.* 2000, 114, 147-153.
18. Yu, S.; Hing, P.; Hu, X. Thermal conductivity of polystyrene-aluminum nitride Composite. *Compos. Part A* 2002, 33, 289-292.
19. Lu, H.; Hu, Y.; Li, M.; Chen, Z.; Fan, W. Structure characteristics and thermal properties of silane-grafted-polyethylene/clay nanocomposite prepared by reactive extrusion. *Comp. Sci. Technol.* 2006.
20. Gudrun Schmidt, Matthew M. Malwitz, Properties of polymer-nanoparticle composites, *Current Opinion in Colloid and Interface Science* 8 (2003) 103-108.
21. Z. Zeng, J. Yu, Z. X. Guo, *J. Polym. Sci.* 43 (2005) 2826.
22. Vaia RA, Wagner HD. Framework for nanocomposites. *Mater Today* 2004;7:32-7.
23. S. Pavlidoua, C. D. Papispyridesb, A review on polymer-layered silicate nanocomposites *Progress in Polymer Science* 33 (2008) 1119-1198.
24. A. Krishna Sailaja, P. Amareshwar, P. Chakravarty, Different Techniques used for the Preparation of nanoparticles using Natural polymers and their application, *International Journal of Pharmacy and Pharmaceutical Sciences* ISSN- 0975-1491 Vol 3, Suppl 2, 2011.
25. Dan Ciprari, Karl Jacob, and Rina Tannenbaum, Characterization of Polymer Nanocomposite Interphase and Its Impact on Mechanical Properties *Macromolecules* 2006, 39, 6565-6573
26. Miranda-Trevino JC, Coles CA. Kaolinite properties, structure and influence of metal retention on pH. *Appl Clay Sci* 2003;23:133-9.
27. Juyoung Kim, James Wainaina, Jae Sik Na, Synthesis of amphiphilic silica/polymer composite nanoparticles as water-dispersible nano-absorbent for hydrophobic pollutants *Journal of Industrial and Engineering Chemistry* (2011)
28. Md. Shahidul Islama, Md. Ashrafal Islam Mollaa, Mithun Sarkera, Mohammad Mainul Karima, Shah Md. Masuma and Jeong Hyun Yeumb. Fabrication of Pillulan/Silver Nanoparticle Composite Nanospheres Using Electrospray Technique for Antibacterial Applications *International Journal of Basic & Applied Sciences IJBAS-IJENS* Vol: 11 No: 01.
29. Kojima Y, Usuki A, Kawasumi M, Kurauchi T, Kamigaito O. One-pot synthesis of nylon 6 clay hybrid. *J Polym Sci, Part A: Polym Chem* 1993; 31: 1755-8.
30. Kojima Y, Usuki A, Kawasumi M, Okada A, Fukushima Y, Kurauchi T, Kamigaito O. Mechanical properties of nylon 6-clay hybrid. *J Mater Res* 1993;8: 1185-9.
31. Blumstein A. Polymerization of adsorbed monolayers: II. Thermal degradation of the inserted polymers, *J Polym Sci A* 1965;3:2665-73.
32. Alexandre M, Dubois P. Polymer-layered silicate nanocomposites: preparation, properties and uses of a new class of materials. *Mater Sci Engng R* 2000;28:1-63.
33. Vaia RA, Vasudevan S, Krawiec W, Scanlon LG, Giannelis EP. New polymer electrolyte nanocomposites: melt intercalation of poly(ethylene oxide) in mica-type silicates. *Adv Mater* 1995;7: 154-6.
34. Lira-Cantu M, Gomez-Romero P (1998) Electrochemical and Chemical Synthesis of the Hybrid Organic-Inorganic Electroactive Material Formed by Phosphomolybdate and Polyaniline. Application as Cation- Insertion Electrodes. *Chem Mater* 10:698-704
35. Hata K, Futaba DN, Mizuno K, Namai T, Yamura M, Iijima S. Waterassisted highly efficient synthesis of impurity-free single-wall carbon nanotubes. *Science* 2004;306(19).
36. J. Gavillet, A. loiseau, C. Journet, F. Willaime, F. Ducatelle and J. C. Charlier, *Phys. Rev. Lett.* 8727, 275504 (2001).
37. Ray H. Baughman, Anvar A. Zakhidov, Walt A. de Heer, and Carbon Nanotubes—the Route Toward Applications *Science* 297, 787 (2002); DOI: 10. 1126/science. 1060928
38. Gudrun Schmidt, Matthew M. Malwitz Properties of polymer-nanoparticle composites *Current Opinion in Colloid and Interface Science* 8 (2003) 103-108.
39. R. G. Ding, G. Q. Lu, Z. F. Yan, M. A. Wilson, *J. Nanosci. Nanotechnol.* 1, 7 (2001)
40. Z. K. Tang et al., *Science* 292, 2462 (2001)
41. R. Bruce Weisman. National Cancer Institute Alliance for Nanotechnology in Cancer *January/February M. Daenen (N)* 2006.
42. M. Daenen P. G. Janssen R. D. de Fouw. A review of current carbon nanotube technologies *Eindhoven University of Technology* 27 February 2003.
43. <http://www.nanotech-now.com/nano-this-nano-that.htm>.
44. Ogasawara T, Ishida Y, Ishikawa T, Yokota R. Characterization of multi-walled carbon nanotube/phenylethynyl terminated polyimide composites. *Composites Part A* 2004;35(1):67-74.
45. Yu M-F, Files BS, Arepalli S, Ruoff RS. Tensile loading of ropes of single wall carbon nanotubes and their mechanical properties. *Phys Rev Lett* 2000;84(24):5552-5
46. Carbon Nanotechnologies, Inc., <http://www.cnanotech.com>.
47. Hone J, Whitney M, Piskoti C, Zettl A. Thermal conductivity of singlewalled carbon nanotubes. *Phys Rev B* 1999;59(4). Thess A, Lee R, Nikolaev P, et al. *Science* 1996;273:483.
48. Mehrez TJ, Guo H, Wang J, Roland C. Carbon nanotube based magnetic tunnel junctions. *Phys Rev Lett* 2000;84(11):2682-5.
49. Tomblor TW, Zhou C, Alexseyev L, Kong J, Dai H, Liu L, et al. Reversible electromechanical characteristics of carbon nanotubes under local-probe manipulation. *Nature* 2000;405:769-72.
50. Yamamoto K, Akita S, Nakayama Y. Orientation and purification of carbon nanotubes using ac electrophoresis. *J Phys D Appl Phys* 1998; 31(8):34-6.
51. Min Zhi Rong, Ming Qiu Zhang, Guang Shi, Qiu Long Ji, Bernd Wetzal, Klaus Friedrich Graft polymerization onto inorganic nanoparticles and its effect on tribological performance improvement of polymer composites *Tribology International* 36 (2003) 697- 707.
52. Hailin Cong, Maciej Radosz, Brian Francis Towler, Youqing Shen Polymer-inorganic nanocomposite membranes for gas separation *Separation and Purification Technology* 55 (2007) 281-291
53. In-Yup Jeon and Jong-Beom Baek Nanocomposites Derived from Polymers and Inorganic Nanoparticles *Materials* 2010, 3, 3654-3674; doi: 10. 3390/ma3063654.

54. Okamoto, M. ; Morita, S. ; Kim, Y. H. ; Kotaka, T. ; Tateyama, H. Synthesis and structure of smectic clay/poly(methyl methacrylate) and clay/polystyrene nanocomposites via in situ intercalative polymerization. *Polymer* 2000, 41, 3887-3890.
55. Kawasumi, M. ; Hasegawa, N. ; Kato, M. ; Usuki, A. ; Okada, A. Preparation and mechanical properties of polypropylene-clay hybrids. *Macromolecules* 1997, 30, 6333- 6338.
56. Gyoo, P.; Venkataramani, S. ; Kim, S. Morphology, thermal, and mechanical properties of polyamide 66/clay nanocomposites with epoxy-modified organoclay. *J. Appl. Polym. Sci.* 2006, 101, 1711-1722.
57. Tomasko, D. L. ; Han, X. ; Liu, D. ; Gao, W. Supercritical fluid applications in polymer nanocomposites. *Curr. Opin. Solid St. Mater. Sci.* 2003, 7, 407-412.
58. Park, S. S. ; Bernet, N. ; De La Roche, S. ; Hahn, H. T. Processing of iron oxide-epoxy vinyl ester nanocomposites. *J. Comp. Mater.* 2003, 37, 465-476.
59. Avadhani, C. V.; Chujo, Y. Polyimide-silica gel hybrids containing metal salts: Preparation via the sol-gel reaction. *Appl. Organometal. Chem.* 1997, 11, 153-161.
60. F. W. Cooke, *Clin. Orthop. Relat. Res.* 276, 135 (1992).
61. E. Cenni et al., *J. Biomater. Sci. Polym. Ed.* 11, 685 (2000).
62. H. -R. Lin, Y. -J. Yeh, *J. Biomed. Mater. Res. Part B: Appl. Biomater.* 71B (1), 52 (2004).
63. C. Du et al., *J. Biomed. Mater. Res.* 42 (4), 540 (1998).
64. E. Boanini et al., *Biomaterials* 27 (25), 4428(2006).
65. U. Edlund, A. -C. Albertsson, *Adv. Polym. Sci.* 157, 67 (2002).
66. R. L. Kronenthal, *Polymer Medicine and Surgery* (Plenum Press, New York, 1975) p. 119. 25. H. Tsuji, Y. Ikada, *Polym. Degrad. Stab.* 67, 179 (2000).
67. Y. H. Lee et al., *Biomaterials* 26 (16), 3165(2005).
68. R. Xu, E. Manias, A. J. Snyder, J. Runt, *Macromolecules* 34 (2), 337 (2001).
69. S. J. Byrne, B. le Bon, S. A. Corr, M. Stefanko, C. O'Connor, Y. K. Gun'ko Y. P. Rakovich, J. F. Donegan, Y. Williams, Y. Volkov, P. Evans, *ChemMedChem* 2, 183 (2007).
70. P. Tartaj, M. D. Morales, S. Veintemillas-Verdaguer, T. Gonzalez-Carreño, C. J. Serna, *J. Phys. D: Appl. Phys.* 36, R182 (2003).
71. Serena A. Corr, Yury P. Rakovich, Yurii K. Gun'ko Multifunctional Magnetic-fluorescent Nanocomposites for Biomedical Applications *Nanoscale Res Lett* (2008) 3:87-104 DOI 10.1007/s11671-008-9122-8.
72. Nikhil Mali, Seema Jadhav, Manisha Karpe, Vilasrao Kadam. Carbon nanotubes as carriers for delivery of bioactive and therapeutic Agents: an overview. *International Journal of Pharmacy and Pharmaceutical Sciences* Vol 3, Issue 3, 2011.